

OPTICO FTTH Kit PTO 4FO Datasheet

Suitable for the indoor cable's termination, fixing and fiber pigtail splicing inbuilding and villas.



• Description

Small size, light weight, beautiful appearance;
 Installed on the flat place, with mechanical protection;
 Additional storage space for incoming cable in the back of the box;
 Flipped tray increase the space for fiber management of its splicing and distribution, decrease line crossing;
 Adaptor type: SC (no ear).

• Advantages

- 1/2/4 FO are available
- can do OEM for any customers and print requested LOGO.
- High reliability and stability
- Can do OEM for any customers and print requested LOGO.
- With application of fiber SC/LC simplex, duplex and other different environment installed plate or flush plate.



• Product Specification(Unit: mm)

Size (LxWxH)	100*83*30
Weight(kg)	0.06
Cable Diameter	Φ3-10
Inlet/outlet	7/4
Capacity	4(single core)


• Installation procedure:

1. Open the box, fix it in the desired position with expansion screw.

2. Install the adapters

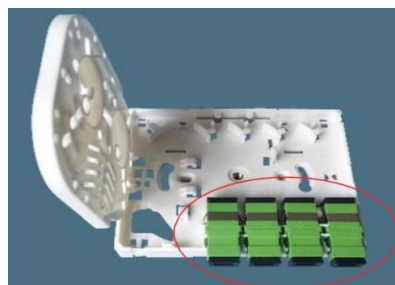
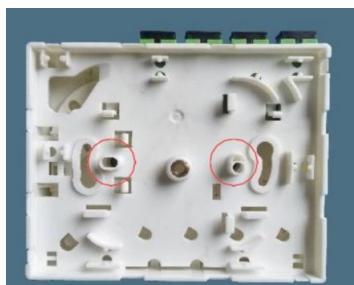


3. Strip the cable, remove the outer and inner sheath, leave 0.3~0.6m of bare fiber, fix the incoming cable with nylon tie; lead the fiber into the tray and coil it, lay the fiber end in the splicing slot.

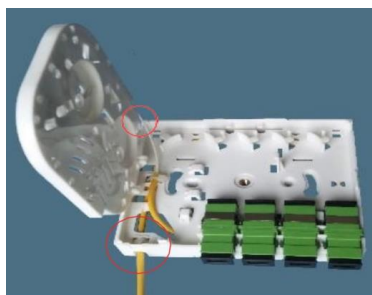

4. Insert the pigtails into the adapters, lead the fibers into the tray, after coiling, lay the fiber end in the splicing slots.

5. Close the box, the installation is completed.

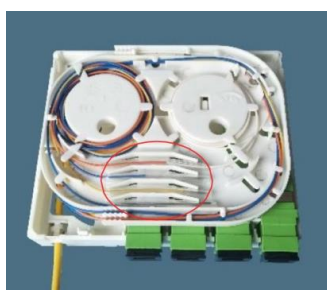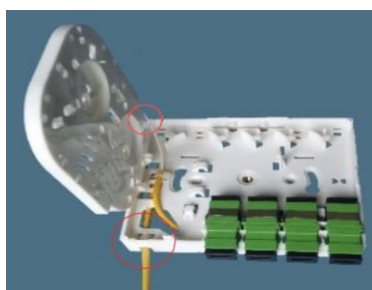

• Package information:

Case body	1 set
Manuscript	1 pc
Heat shrinkable sleeve(L ≤ 45mm)	1~4pcs(optional)
Expansion screw	2 sets